

BE4V Medium Duty SD Vinyl Panel

BSEN 12825:2001 – 4/A/3/2 Medium Duty

The panel consists of a high grade 30mm high density particle board core with full FSC accreditation in a sandwich construction with steel top and bottom sheet. It is then covered with our standard static dissipative Gerflor Mipolam EL7 Robust Vinyl or other customer approved. This then has a full depth ABS edge band applied creating a fully encapsulated panel to be laid with complete electrical continuity and has a high resistance to damage.


Product	Class	Safety Factor	Ultimate Load	Panel Thickness	System Weight	Duty
BE4V	4/A/3/2	3 x	≥ 9kN	33mm (nominal)	35kg/m ²	Medium

Certification


The panel is fully tested to the BSEN 12825:2001 4/A3/2 specification Medium Grade specification and is fully compliant. All of the RMF BSEN12825 panels have a 3 times safety factor, Class "O" spread of flame resistance and a 10 year warranty.

Full FSC accreditation No FSC-ACC-008 TT-COC-003493.


Galvanised steel top and bottom sheet with vinyl covering

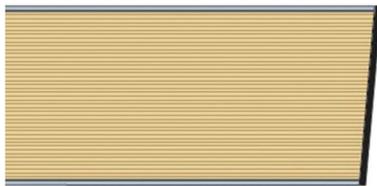

The mark of responsible forestry



Full depth ABS edging

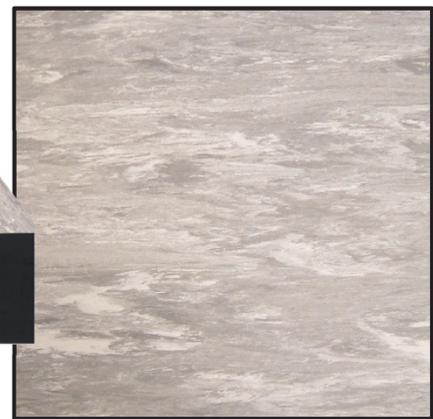

Finish

All of the RMF edge banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile, carpet, high pressure laminate and vinyl. All of the edge banded factory bonded panels can be perforated for air flow. Whatever your requirement, RMF will have the flooring solution to suit you.

Manufacture

All panels are manufactured in for RMF in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



The first choice for access flooring systems

For more information call:
01926 425289
sales@rmf-services.co.uk