PSA **Steel Encapsulated Panel**

Titan Corner Lock

Tested in accordance with PSA MOB PF2 PS/SPU for raised access floors



Medium Grade Panel

Performance & Technical Specification

Size	600mm x 600mm
Thickness	29mm
(Nominal)	
Weight (Typical)	10kg
Core	High Density Chipboard
Casing	Corrosion Resistant Galvanised Steel

Performance

PSA MOB PF2 PS/SPU - Medium Grade	
Point Load Uniformly	3kN(25mm ²)
Distributed Load	8kN/m ²

Floor Finish

RMF Titan panels are provided bare to accept a wide range of loose lay carpet tile floor coverings.

Accessories

Pedestals - HD (standard) Range. Performance certification is only issued when using the RMF corner lock panels with RMF HD pedestals.

Foil Tape

Foam Tape

Other Accessories

Gaskets Adhesive

Specify As


RMF Titan Corner Lock PSA medium grade access flooring panel 600 x 600 x 29mm with high density chipboard core encapsulated in corrosion resistant galvanised sheet steel featuring unique stitched edge detail for greater strength and durability. Manufactured to meet PSA MOB PF2 PS/SPU medium grade.

Product Codes	
Order Code	Titan Corner Lock PSA
Description	600 x 600 x 29mm Medium Grade Bare Steel Encapsulated Corner Lock Panel

Warranty only valid when a full RMF Access Floor system including panels and under structure is installed



RAISED MODULAR FLOORING

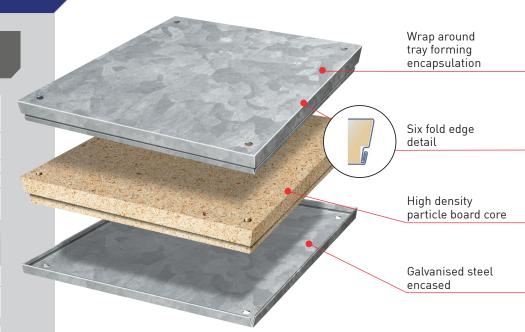

The RMF Titan Corner Lock MOB PF2 PS/SPU panels are amongst the most technically advanced available today, combining high performance structural materials and innovative manufacturing technology.

RMF Titan panels consist of fully encapsulated in corrosion resistant galvanised steel with high-performance core. Die formed top and bottom sheets which are then mechanically interlocked and post formed in a fully automated manufacturing process.

The RMF Titan panels have a unique six-fold edge detail incorporating a recessed interlocking fold which gives exceptional tensile rigidity translating to lesser deflections at higher loads when tested to international standards.

RMF Titan panels are also available as a Gravity Lay system.

- Manufactured to achieve PSA MOB PF2 PS/SPU
- Unique design
- Solid feel underfoot
- Corrosion resistant
- · Supplied bare to accept and appropriate loose lay floor covering
- Tested with HD pedestals to a 600mm void height

RMF operates a policy of continual development and reserves the right to change specification without prior notification.

For full details of other vinyl colours, plus carpet and laminate coverings, please contact RMF.

- RMF Established in 1988
- Modifications and Refurbishments
- Nationwide Contracting
- Maintenance and Service
- Products always in stock
- Supply and Installation Spares and Repairs

RMF Installation and Services Limited Unit 23 St Mary's Road

Leamington Spa

Warwickshire

CV31 1PR

Sydenham Industrial Estate

call the experts: 01926 425289

or email: info@rmf-services.co.uk

rmf-services.co.uk