

# PSA

## Steel Encapsulated Panel

### Titan Gravity Lay

Tested in accordance with PSA MOB PF2 PS/SPU for raised access floors



#### Medium Grade Panel

##### Performance & Technical Specification

Size	600mm x 600mm
Thickness (Nominal)	29mm
Weight (Typical)	10kg
Core	High Density Chipboard
Casing	Corrosion Resistant Galvanised Steel

##### Performance

PSA MOB PF2 PS/SPU - Medium Grade	
Point Load	3kN(25mm <sup>2</sup> )
Uniformly Distributed Load	8kN/m <sup>2</sup>

##### Floor Finish

RMF Titan panels are provided bare to accept a wide range of loose lay carpet tile floor coverings.

##### Accessories

Pedestals - HD (standard) Range.  
Performance certification is only issued when using the RMF gravity lay panels with RMF HD pedestals.

##### Other Accessories


Gaskets      Foil Tape  
Adhesive      Foam Tape

##### Specify As

RMF Titan Gravity Lay PSA medium grade access flooring panel 600 x 600 x 29mm with high density chipboard core encapsulated in corrosion resistant galvanised sheet steel featuring unique stitched edge detail for greater strength and durability. Manufactured to meet PSA MOB PF2 PS/SPU medium grade.

##### Product Codes

Order Code	Titan Gravity Lay PSA
Description	600 x 600 x 29mm Medium Grade Bare Steel Encapsulated Gravity Lay Panel

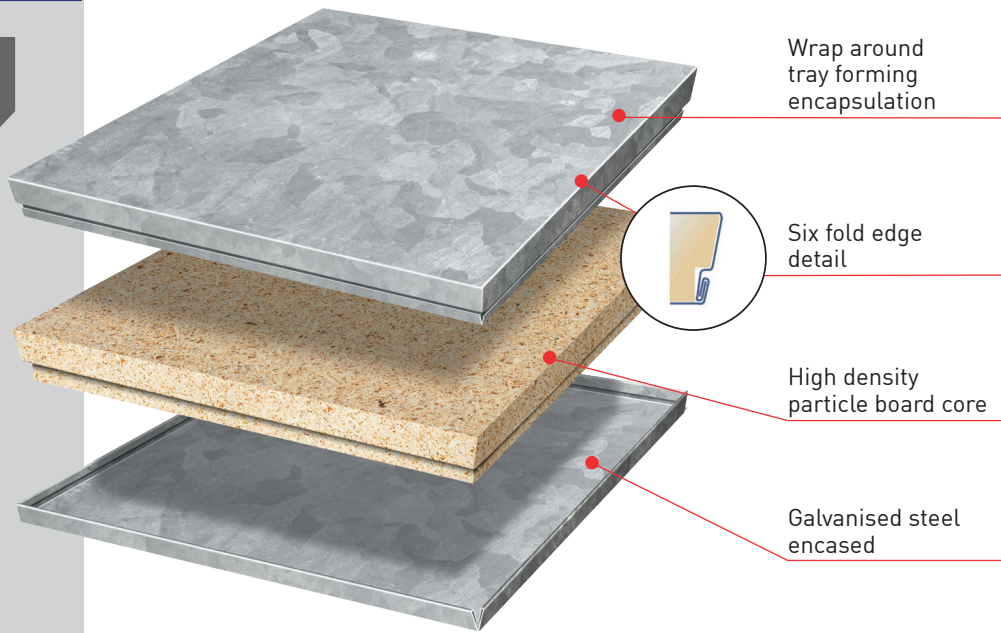

Wrap around tray forming encapsulation

Six fold edge detail

High density particle board core

Galvanised steel encased

The RMF Titan Gravity Lay MOB PF2 PS/SPU panels are amongst the most technically advanced available today, combining high performance structural materials and innovative manufacturing technology.

RMF Titan panels consist of fully encapsulated in corrosion resistant galvanised steel with high-performance core. Die formed top and bottom sheets which are then mechanically interlocked and post formed in a fully automated manufacturing process.

The RMF Titan panels have a unique six-fold edge detail incorporating a recessed interlocking fold which gives exceptional tensile rigidity translating to lesser deflections at higher loads when tested to international standards.

RMF Titan panels are also available as a Corner Lock system.

- Manufactured to achieve PSA MOB PF2 PS/SPU
- Unique design
- Solid feel underfoot
- Corrosion resistant
- Supplied bare to accept and appropriate loose lay floor covering
- Tested with HD pedestals to a 600mm void height

RMF operates a policy of continual development and reserves the right to change specification without prior notification.

For full details of other vinyl colours, plus carpet and laminate coverings, please contact RMF.

# Warranty only valid when a full RMF Access Floor system including panels and under structure is installed

- RMF Established in 1988
- Nationwide Contracting
- Supply and Installation
- Spares and Repairs
- Modifications and Refurbishments
- Maintenance and Service
- Products always in stock



RMF Installation and Services Limited  
Unit 23 St Mary's Road  
Sydenham Industrial Estate  
Leamington Spa  
Warwickshire  
CV31 1PR

call the experts: **01926 425289**

or email: [info@rmf-services.co.uk](mailto:info@rmf-services.co.uk)

[rmf-services.co.uk](http://rmf-services.co.uk)